

KOBELCOPerformance  Design**SK125SR SK135SR SK135SRLC**

■ Bucket capacity:


0.24–0.57 m³

■ Engine power:

73.0 kW / 2,000 min⁻¹

■ Operating weight:

13,100–15,500 kg

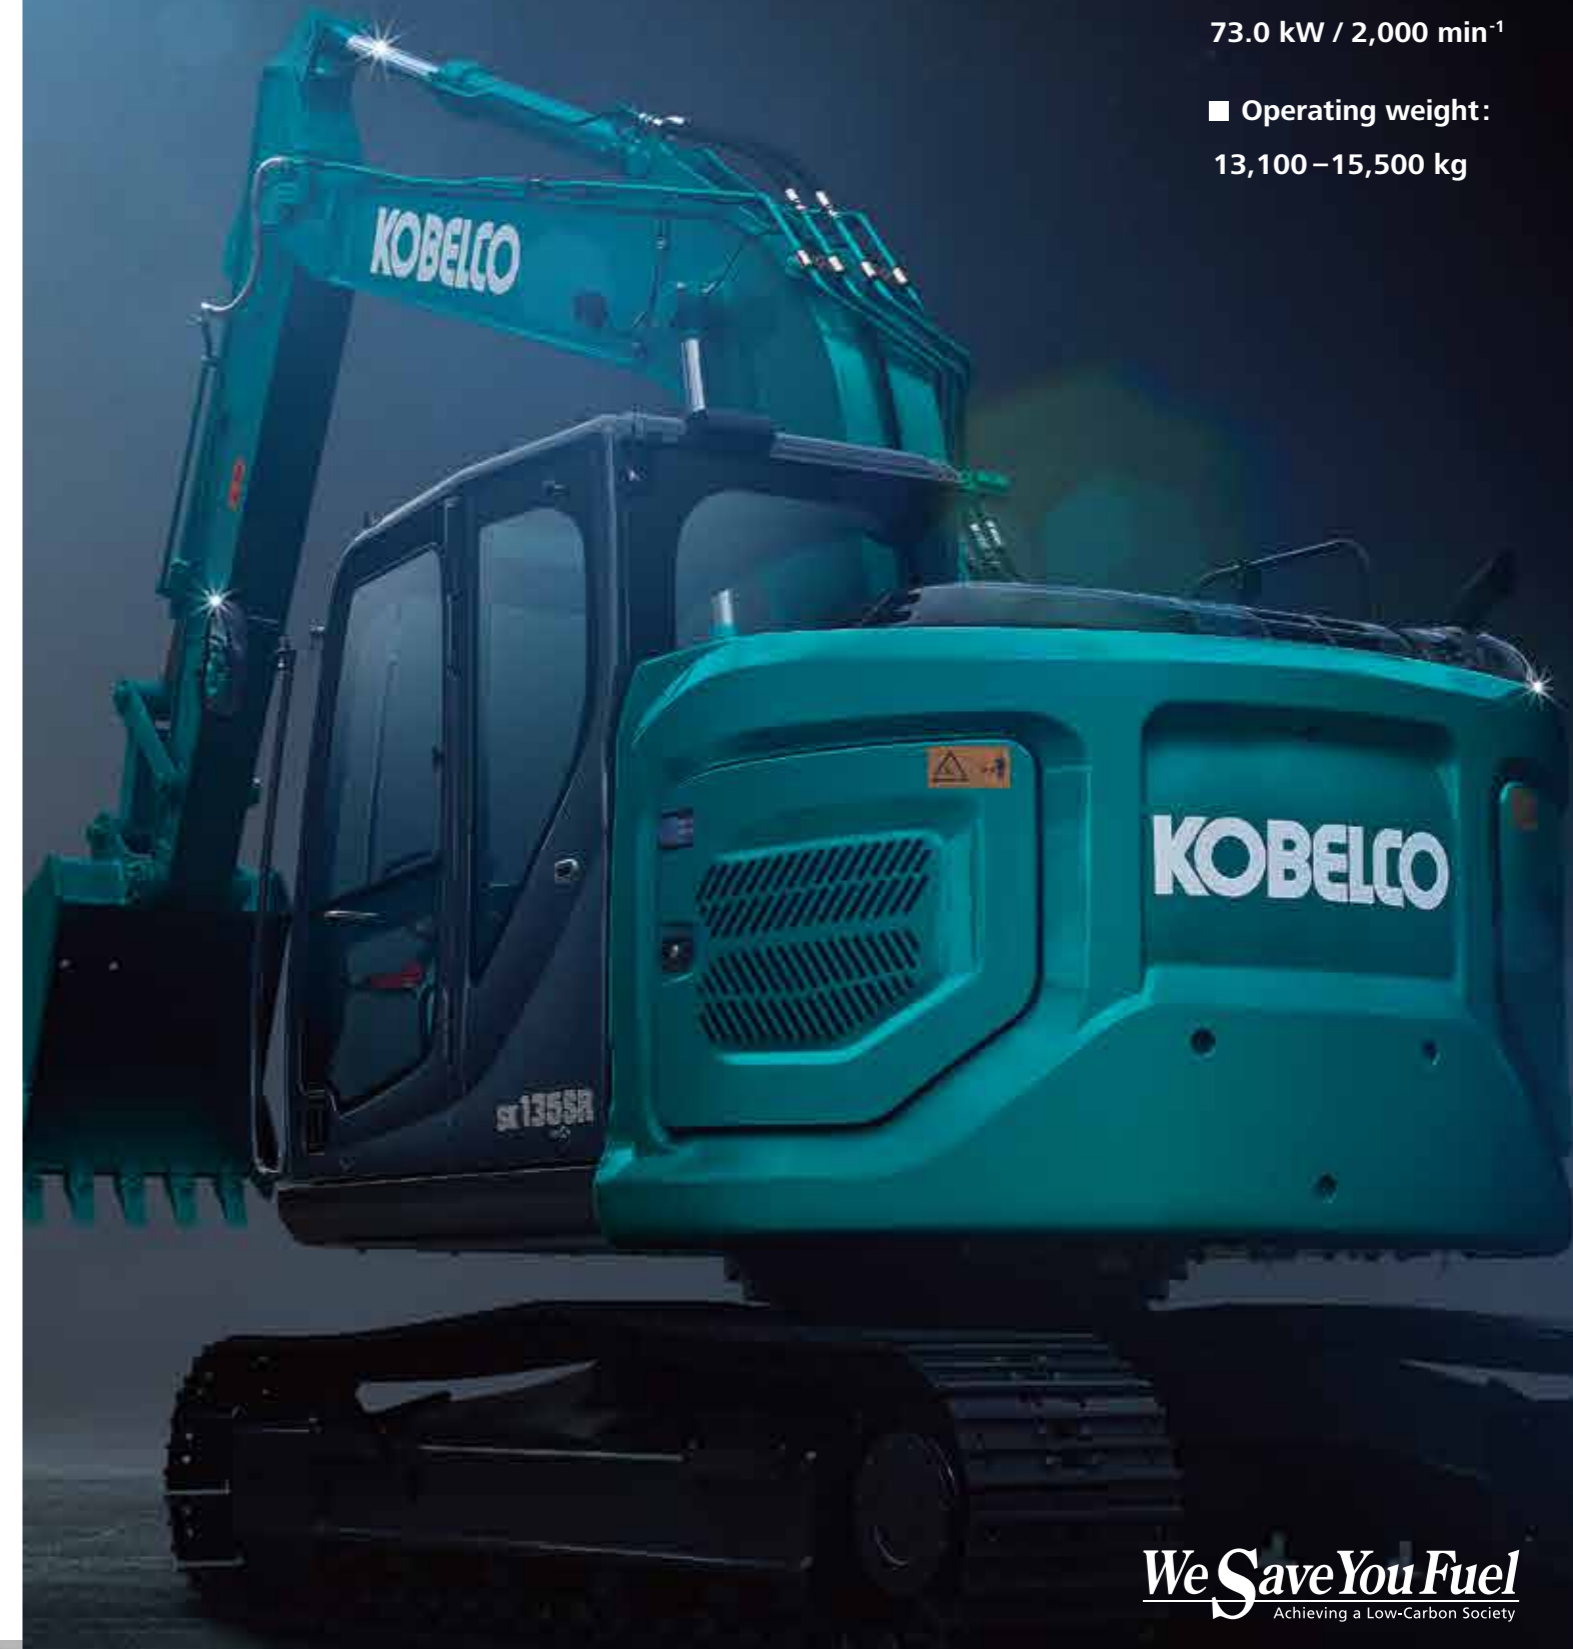

Note: This catalogue may contain attachments and optional equipment that are not available in your area. And it may contain photographs of machines with specifications that differ from those of machines sold in your areas. Please consult your nearest KOBELCO distributor for those items you require. Due to our policy of continuous product improvements all designs and specifications are subject to change without advance notice. Copyright by **KOBELCO CONSTRUCTION MACHINERY CO., LTD.** No part of this catalogue may be reproduced in any manner without notice.

KOBELCO CONSTRUCTION MACHINERY CO., LTD.

5-15, Kitashinagawa 5-chome, Shinagawa-ku, Tokyo 141-8626 JAPAN
 Tel: +81 (0) 3-5789-2146 Fax: +81 (0) 3-5789-2135
 www.kobelcocm-global.com

Inquiries To:

Bulletin No. SK125SR_SK135SR_SK135SRLC-7-ASIA-101-2112XXE

We Save You Fuel
 Achieving a Low-Carbon Society



Performance  Design

SK125SR,SK135SR,SK135RLC of KOBELCO has realised a completely new value by harmonising PERFORMANCE – greater efficiency and productivity with an increased power and speed and DESIGN – operator-based operability and comfort, refusing to accept any compromises.

In pursuit of unique and matchless machines which are unforgettable once you use them, KOBELCO will continue to rise to meet every challenge.

THE ULTIMATE IN SIMPLE AND ELEGANT DESIGN

Our pursuit of functional beauty and aesthetic sense produced a new interior design.

Jog dial

This jog dial integrates multiple functions to realise simple operations. Even with gloved hands, the operator can set various machine conditions without stress.

LED backlights

The switches and dials have LED backlights – they provide a bright, clear view in the dark and set a luxurious mood.





UNFORGETTABLE COMFORT

❶ Air conditioner blowing from the rear

Air is blown against the operator's waist and the back of their head, offering more comfortable operation.

❷ Lever angles allow for comfortable operations

The operator can move the levers horizontally without twisting their wrist, which reduces the fatigue caused by the operations.



New hydraulic control

Our newly upgraded hydraulic control system responds to shorter lever strokes than current models, delivering swifter, more precise movement and improved lever operability.

❸ LED door light

The LED interior light automatically turns on when the door is opened or when the ignition is set to OFF. This ensures easy entry and exit at nighttime.

❹ ROPS Cab

ROPS (Roll-Over-Protective Structure)-compliant cab clears ISO standards (ISO-12117-2: 2008) and ensures greater safety for the operator should the machine tip over.






A WIDER VIEW BRINGS A WIDER RANGE OF USE

10-inch colour monitor (the largest in the industry)

The easy-to-operate menu screen facilitates reading of important information. Images from the built-in cameras can be checked on the large screen, which helps secure safety. In addition, each icon has become easy to recognise.



The right camera and rear camera (right side view mode)



The right camera and rear camera (straight view mode)





The bird's-eye view

Right and rear cameras

Images from the right camera and rear camera are displayed together on the large colour monitor. The right camera view can be selected between the straight view mode and right side view mode.

In addition, the bird's-eye view mode can also be selected.



Screen display linked with the jog dial operation

The jog dial can be operated as desired without causing stress. Turn the jog dial to the right or left to select an item and press the dial to confirm the selection.



Greatly improved digging performance

Bucket Digging Force

105.4 kN ISO6015

Increased by **17%**

(Compared to SK135SR-2 model)

Digging volume per hour

Increased by **20%**

(Compared to SK135SR-2 at H mode)

>>> New hydraulic control

The redesigned hydraulic flow division ensures the right pressure at the right time for faster digging. It contributes to improved cycle time.

GREATER MULTI-FUNCTION CAPABILITIES

Attachment mode

The flow-rate modes of the bucket, breaker, nibbler, and rotating grapple are set before delivery, which allows you to start operating immediately. Mode settings for other attachments, such as the tilt rotator, can easily be added or changed.





Adjustment for hydraulic flow

Divide ratio of hydraulic flow can be adjusted by service factory for custom usage.



NON-STOP OPERATION BY iNDr

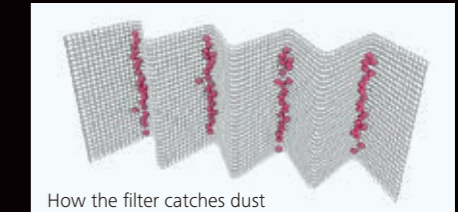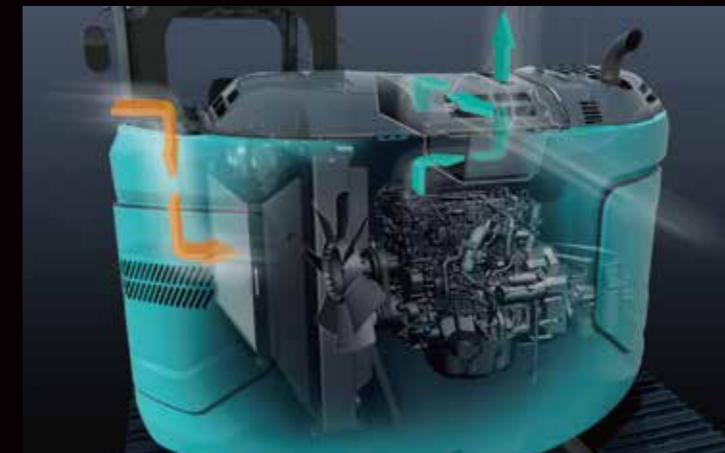

How the filter catches dust

iNDr Filter

A high-density stainless steel mesh filter blocks dust and debris from entering the cooling package during air intake. This prevents the cooling package and air cleaner from clogging, allowing the machine to maintain cooling performance. The ridges of the corrugated filter allow air to pass through, while the grooves collect dust and debris, preventing the filter from clogging.

CONVENIENT AND SENSIBLE EQUIPMENT



Engine start password

A password is required when starting the engine for greater security. The initial password must be set at our workshop.



Wiper adjustment function

In addition to the intermittent wiper mode and continuous wiper mode, the one-time wiper mode was added.



Console mount

The console-integrated seat allows for comfortable operation.



24 V power outlet



Smartphone holder



Built-in rear camera/right camera

Specifications

Engine

Model	ISUZU MOTORS LIMITED 4JJ1XDJA
Type	Four cycle, water cooled, overhead camshaft, vertical in-line, direct injection type, with turbocharger
No. of cylinders	4
Bore and stroke	95.4 mm x 104.9 mm
Displacement	2.999 L
Rated power output	65.4 kW/2,000 min ⁻¹ (ISO 9249: with fan)
	73.0 kW/2,000 min ⁻¹ (ISO 14396: without fan)
Max. torque	341 N·m/1,600 min ⁻¹ (ISO 9249: with fan)
	365 N·m/1,600 min ⁻¹ (ISO 14396: without fan)

Hydraulic system

Pump	
Type	Two variable displacement axial piston pumps + one gear pump
Max. discharge flow	2 x 130 L/min 1 x 20 L/min
Relief valve setting	
Boom, arm and bucket	34.3 MPa
Travel circuit	34.3 MPa
Swing circuit	28.0 MPa
Control circuit	5.0 MPa
Pilot control pump	Gear type
Main control valves	12-spool
Oil cooler	Air cooled type

Swing system

Swing motor	One fixed displacement piston pump
Brake	Hydraulic; locking automatically when the swing control lever is in the neutral position
Parking brake	Wet multiple plate
Swing speed	11.0 min ⁻¹
Tail swing radius	1,490 mm
Swing torque	40.4 kN·m

Attachments

Backhoe bucket and combination

Use	Backhoe bucket												
	Normal digging												
Bucket capacity	ISO heaped	m ³	0.24	0.31	0.38	0.45	0.45*	0.50	0.50**	0.50***	0.50*	0.57	0.57**
	Struck	m ³	0.20	0.23	0.28	0.35	0.35	0.37	0.35	0.37	0.37	0.43	0.40
Opening width	With side cutter	mm	590	700	800	915	915	1,000	1,030	1,000	1,000	1,100	1,150
	Without side cutter	mm	500	640	740	855	855	940	945	940	940	1,040	1,070
No. of teeth			3	3	4	4	4	5	5	5	5	5	5
Bucket weight		kg	280	300	340	360	430	390	420	420	470	410	450
Combination	2.38 m arm		○(○)	○(○)	○(○)	○(○)	○(○)	⊙(△)	○(-)	○(-)	○(-)	△(-)	△(-)
	2.84 m arm		○(○)	○(○)	⊙(⊙)	△(△)	△(△)	×(×)	×(-)	×(-)	×(-)	×(-)	×(-)

○ Standard ○ Recommended △ Loading only × Not recommended

*Bottom plate reinforcement, **Side pin, ***For demolition
() = SK125SR

Travel system

Travel motors	Variable displacement axial piston, two-speed motors
Travel brakes	Hydraulic brake
Parking brakes	Wet multiple plate
Travel shoes	44 each side
Travel speed	3.4/5.6 km/h
Drawbar pulling force	141 kN (SAE)
Gradeability	70% {35°}

Cab & control

Cab	
All-weather, sound-suppressed steel cab mounted on the silicon-sealed viscous mounts and equipped with a heavy, insulated floor mat	
Control	
Two hand levers and two foot pedals for travel	
Two hand levers for excavating and swing	
Electric rotary-type engine throttle	

Boom, arm & bucket

Boom cylinders	100 mm x 1,092 mm
Arm cylinder	115 mm x 1,116 mm
Bucket cylinder	100 mm x 903 mm

Refilling capacities & lubrications

Fuel tank	186 L
Cooling system	17 L
Engine oil	17 L
Travel reduction gear	2 x 2.1 L
Swing reduction gear	1.65 L
Hydraulic oil tank	89.9 L tank oil level
	176 L hydraulic system

Working ranges


Boom		4.68 m	
Arm		2.38 m	2.84 m
Range			
a- Max. digging reach		8.37	8.81
b- Max. digging reach at ground level		8.21	8.66
c- Max. digging depth		5.52	5.98
d- Max. digging height		9.18	9.55
e- Max. dumping clearance		6.75	7.11
f- Min. dumping clearance		2.62	2.25
g- Max. vertical wall digging depth		4.50	4.95
h- Min. swing radius		2.13	2.52
i- Horizontal digging stroke at ground level		4.19	4.67
j- Digging depth for 2.4 m (8') flat bottom		5.29	5.78
Bucket capacity ISO heaped m ³		0.50	0.38

Digging Force (ISO 6015)

Digging Force (ISO 6015)		Unit: kN	
Arm length		2.38 m	2.84 m
Bucket digging force		105.4	
Arm crowding force		64.0	58.0


Dimensions

Arm length		2.38 m	2.84 m
A Overall length	SK125SR/SK135SR	7,430/8,070**	7,440/8,080**
	SK135SR _{LC}	7,510/8,070**	7,530/8,070**
B Overall height (to top of boom)		2,740	3,140
C Overall width (500 mm shoe)		2,490	
D Overall height (to top of cab)		2,810	
E Ground clearance of rear end*		870*	
F Ground clearance* {with dozer**}		400* {400* **}	
G Tail swing radius {additional counterweight}		1,490	

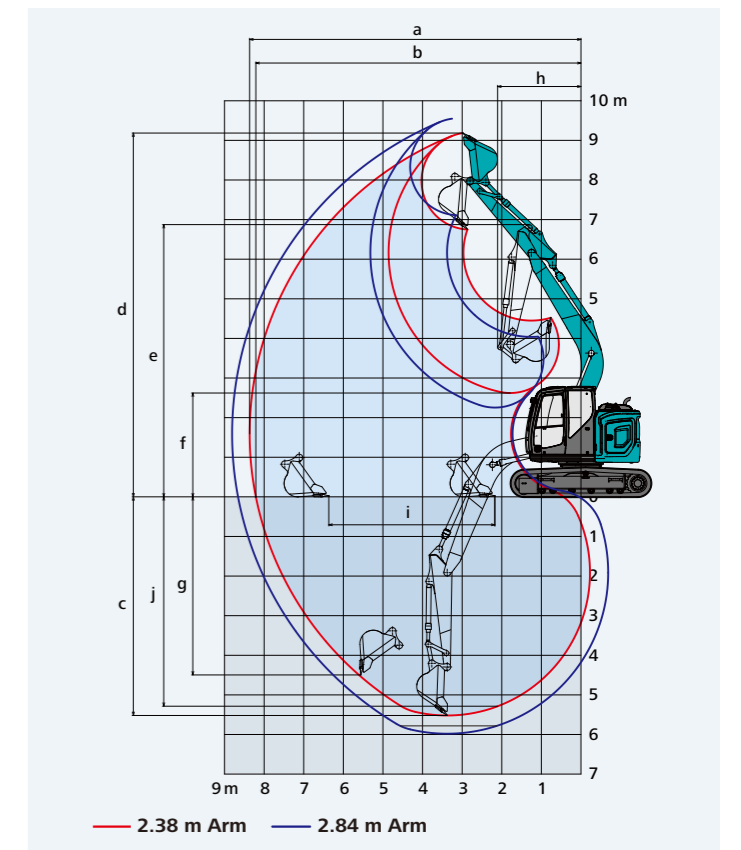

Dimensions		Unit: mm	
G' Distance from centre of swing to rear end {additional counterweight}		1,490	
H Tumbler distance	SK125SR/SK135SR	2,870	
	SK135SR _{LC}	3,040	
I Overall length of crawler	SK125SR/SK135SR	3,580	
	SK135SR _{LC}	3,750	
J Track gauge		1,990	
K Shoe width		500	
L Overall width of upperstructure		2,480	

*Without including height of shoe lug **With Dozer

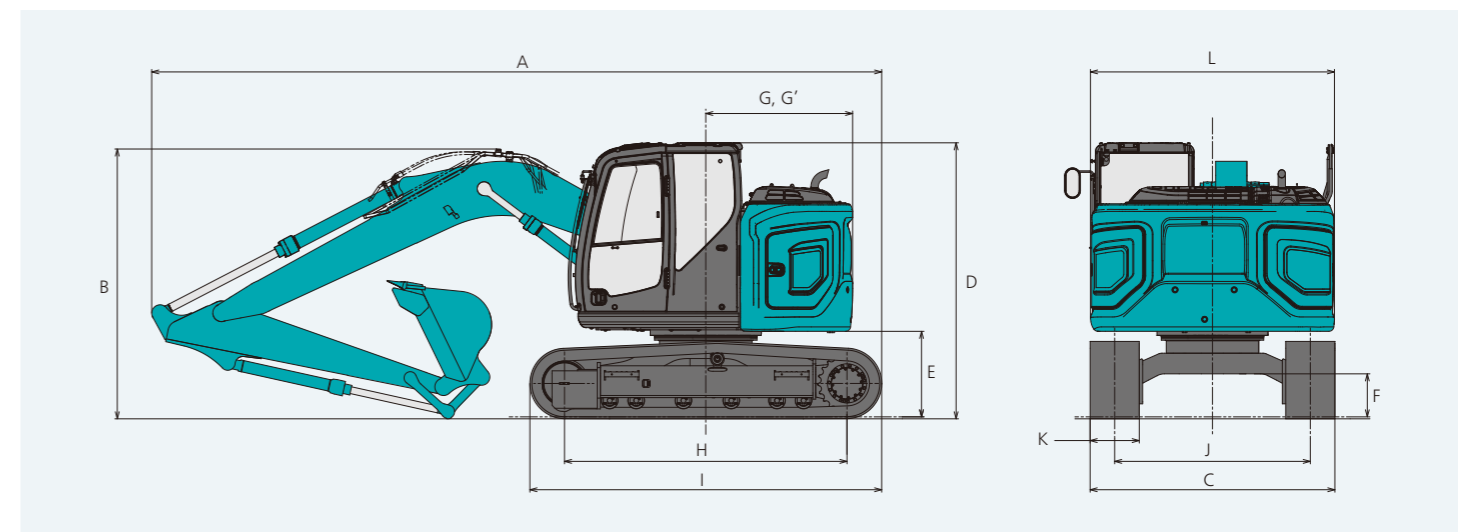

Operating weight & ground pressure

SK125SR-7 : Boom: 4.68 m Arm: 2.38 m Bucket: 0.45 m³ ISO heaped bucket Dozer: without

Shaped		Triple grouser shoes (even height)		
Shoe width	mm	500	600	700
Overall width of crawler	mm	2,490	2,590	2,690
Ground pressure	kPa	41	35	31
Operating weight	kg	13,100	13,300	13,600

SK125SR-7 : Boom: 4.68 m Arm: 2.38 m Bucket: 0.45 m³ ISO heaped bucket Dozer: with

Shaped		Triple grouser shoes (even height)		
Shoe width	mm	500	600	700
Overall width of crawler	mm	2,490	2,590	2,690
Ground pressure	kPa	44	37	32
Operating weight	kg	13,900	14,100	14,400

SK135SR-7 : Boom: 4.68 m Arm: 2.38 m Bucket: 0.50 m³ ISO heaped bucket Dozer: without

Shaped		Triple grouser shoes (even height)		
Shoe width	mm	500	600	700
Overall width of crawler	mm	2,490	2,590	2,690
Ground pressure	kPa	44	37	32
Operating weight	kg	14,000	14,200	14,400

SK135SR-7 : Boom: 4.68 m Arm: 2.38 m Bucket: 0.50 m³ ISO heaped bucket Dozer: with

Shaped		Triple grouser shoes (even height)		
Shoe width	mm	500	600	700
Overall width of crawler	mm	2,490	2,590	2,690
Ground pressure	kPa	46	39	34
Operating weight	kg	14,800	15,000	15,300

SK135RSLC-7 : Boom: 4.68 m Arm: 2.38 m Bucket: 0.50 m³ ISO heaped bucket Dozer: without

Shaped		Triple grouser shoes (even height)		
Shoe width	mm	500	600	700
Overall width of crawler	mm	2,490	2,590	2,690
Ground pressure	kPa	42	36	31
Operating weight	kg	14,200	14,400	14,700

SK135RSLC-7 : Boom: 4.68 m Arm: 2.38 m Bucket: 0.50 m³ ISO heaped bucket Dozer: with

Shaped		Triple grouser shoes (even height)		
Shoe width	mm	500	600	700
Overall width of crawler	mm	2,490	2,590	2,690
Ground pressure	kPa	45	38	33
Operating weight	kg	15,000	15,200	15,500

Lift capacities

SK125SR


SK125SR-7

SK135SR

SK135SR-7

SK135RSLC

SK135RSLC-7



Rating over front

Rating over side or 360 degrees

A - Reach from swing centreline to arm top
B - Arm top height above/below ground
C - Lift point

Relief valve setting: 34.3 MPa

SK125SR		Arm: 2.38 m Bucket: without Counterweight: 2,340 kg Shoe: 500 mm Dozer: without										
		1.5 m		3.0 m		4.5 m		6.0 m		At Max. Reach		
		Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Radius
7.5m	kg									*2,300	*2,300	3.80 m
6.0m	kg					*3,450	3,100			*1,830	*1,830	5.55 m
4.5m	kg			*4,330	*4,330	*3,730	3,010	2,740	1,860	*1,700	1,600	6.50 m
3.0m	kg			*6,650	5,210	4,220	2,790	2,660	1,780	*1,690	1,370	6.99 m
1.5m	kg			*5,270	4,490	3,940	2,540	2,540	1,670	*1,790	1,280	7.14 m
G.L.	kg			*6,040	4,290	3,760	2,380	2,460	1,590	1,990	1,300	6.94 m
-1.5m	kg	*5,320	*5,320	7,460	4,300	3,700	2,330	2,430	1,570	2,230	1,450	6.39 m
-3.0m	kg	*9,090	*9,090	*6,610	4,420	3,770	2,390			2,930	1,900	5.36 m

SK125SR		Arm: 2.38 m Bucket: without Counterweight: 2,340 kg Shoe: 500 mm Dozer: blade up										
		1.5 m		3.0 m		4.5 m		6.0 m		At Max. Reach		
		Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Radius
7.5m	kg									*2,300	*2,300	3.80 m
6.0m	kg					*3,450	3,280			*1,830	*1,830	5.55 m
4.5m	kg			*4,330	*4,330	*3,730	3,190	2,840	1,980	*1,700	*1,700	6.50 m
3.0m	kg			*6,650	5,530	4,360	2,960	2,760	1,900	*1,690	1,470	6.99 m
1.5m	kg			*5,270	4,800	4,080	2,710	2,640	1,800	*1,790	1,380	7.14 m
G.L.	kg			*6,040	4,600	3,900	2,550	2,550	1,720	*2,000	1,400	6.94 m
-1.5m	kg	*5,320	*5,320	7,750	4,610	3,850	2,500	2,530	1,690	2,320	1,560	6.39 m
-3.0m	kg	*9,090	*9,090	*6,610	4,740	3,910	2,560			3,040	2,040	5.36 m

SK135SR		Arm: 2.38 m Bucket: without Counterweight: 3,150 kg Shoe: 500 mm Dozer: without										
		1.5 m		3.0 m		4.5 m		6.0 m		At Max. Reach		
		Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Radius
7.5m	kg									*2,300	*2,300	3.80 m
6.0m	kg					*3,450	*3,450			*1,830	*1,830	5.55 m
4.5m	kg			*4,330	*4,330	*3,730	3,410	3,100	2,140	*1,700	*1,700	6.50 m
3.0m	kg			*6,650	5,930	*4,510	3,190	3,020	2,060	*1,690	1,600	6.99 m
1.5m	kg			*5,270	5,210	4,470	2,940	2,900	1,960	*1,790	1,510	7.14 m
G.L.	kg			*6,040	5,010	4,290	2,780	2,820	1,880	*2,000	1,530	6.94 m
-1.5m	kg	*5,320	*5,320	*8,230	5,020	4,240	2,730	2,790	1,850	*2,460	1,710	6.39 m
-3.0m	kg	*9,090	*9,090	*6,610	5,140	4,300	2,790			3,340	2,220	5.36 m

SK135SR		Arm: 2.38 m Bucket: without Counterweight: 3,150 kg Shoe: 500 mm Dozer: blade up										
		1.5 m		3.0 m		4.5 m		6.0 m		At Max. Reach		
		Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Radius
7.5m	kg									*2,300	*2,300	3.80 m
6.0m	kg					*3,450	*3,450			*1,830	*1,830	5.55 m
4.5m	kg			*4,330	*4,330	*3,730	3,600	3,190	2,270	*1,700	*1,700	6.50 m
3.0m	kg			*6,650	6,260	*4,510	3,380	3,100	2,190	*1,690	*1,690	6.99 m
1.5m	kg			*5,270	*5,270	4,600	3,130	2,990	2,080	*1,790	1,610	7.14 m
G.L.	kg			*6,040	5,340	4,420	2,960	2,900	2,000	*2,000	1,640	6.94 m
-1.5m	kg	*5,320	*5,320	*8,230	5,350	4,360	2,920	2,880	1,980	*2,460	1,830	6.39 m
-3.0m	kg	*9,090	*9,090	*6,610	5,470	4,430	2,980			3,440	2,370	5.36 m

Lift capacities

SK135SRLC		Arm: 2.38 m Bucket: without Counterweight: 3,150 kg Shoe: 500 mm Dozer: without										
A		1.5 m		3.0 m		4.5 m		6.0 m		At Max. Reach		Radius
		1.5 m	1.5 m	3.0 m	3.0 m	4.5 m	4.5 m	6.0 m	6.0 m	At Max. Reach	At Max. Reach	
7.5m	kg									*2,300	*2,300	3.80 m
6.0m	kg					*3,450	*3,450			*1,830	*1,830	5.55 m
4.5m	kg			*4,330	*4,330	*3,730	3,460	*3,400	2,170	*1,700	*1,700	6.50 m
3.0m	kg			*6,650	6,020	*4,510	3,240	3,320	2,090	*1,690	1,630	6.99 m
1.5m	kg			*5,270	*5,270	4,980	2,990	3,210	1,990	*1,790	1,530	7.14 m
G.L.	kg			*6,040	5,090	4,790	2,830	3,120	1,910	*2,000	1,560	6.94 m
-1.5m	kg	*5,320	*5,320	*8,230	5,100	4,740	2,780	3,100	1,890	*2,460	1,740	6.39 m
-3.0m	kg	*9,090	*9,090	*6,610	5,230	*4,570	2,840			*3,480	2,260	5.36 m

SK135SRLC		Arm: 2.38 m Bucket: without Counterweight: 3,150 kg Shoe: 500 mm Dozer: blade up										
A		1.5 m		3.0 m		4.5 m		6.0 m		At Max. Reach		Radius
		1.5 m	1.5 m	3.0 m	3.0 m	4.5 m	4.5 m	6.0 m	6.0 m	At Max. Reach	At Max. Reach	
7.5m	kg									*2,300	*2,300	3.80 m
6.0m	kg					*3,450	*3,450			*1,830	*1,830	5.55 m
4.5m	kg			*4,330	*4,330	*3,730	3,650	*3,400	2,300	*1,700	*1,700	6.50 m
3.0m	kg			*6,650	6,340	*4,510	3,420	3,420	2,220	*1,690	*1,690	6.99 m
1.5m	kg			*5,270	*5,270	5,120	3,170	3,310	2,120	*1,790	1,640	7.14 m
G.L.	kg			*6,040	5,420	4,940	3,010	3,220	2,040	*2,000	1,670	6.94 m
-1.5m	kg	*5,320	*5,320	*8,230	5,430	4,880	2,960	3,190	2,010	*2,460	1,860	6.39 m
-3.0m	kg	*9,090	*9,090	*6,610	5,550	*4,570	3,020			*3,480	2,400	5.36 m

- Note:**
- Do not attempt to lift or hold any load that is greater than these lift capacities at their specified lift point radius and heights. Weight of all accessories must be deducted from the above lift capacities.
 - Lift capacities are based on machine standing on level, firm, and uniform ground. User must make allowance for job conditions such as soft or uneven ground, out of level conditions, side loads, sudden stopping of loads, hazardous conditions, experience of personnel, etc.
 - Bucket pin attachment point defined as lift point.
 - The above lift capacities are in compliance with ISO 10567. They do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Lift capacities marked with an asterisk(*) are limited by hydraulic capacity rather than tipping load.
 - Operator should be fully acquainted with the Operator's and Maintenance Instructions before operating this machine. Rules for safe operation of equipment should be adhered to at all times.
 - Lift capacities apply to only machine as originally manufactured and normally equipped by KOBELCO CONSTRUCTION MACHINERY CO., LTD.

STANDARD EQUIPMENT

ENGINE

- Engine, ISUZU MOTORS LIMITED 4JJ1XDJA, Direct injection type, with turbocharger
- Auto Idle Stop
- Automatic engine deceleration
- Batteries (2 x 12 V - 88 Ah)
- Starting motor (24 V - 4 kW), 50 amp alternator
- Engine oil pan drain cock
- Double element air cleaner

CONTROL

- Working mode selector (H-mode, S-mode and ECO-mode)

SWING SYSTEM & TRAVEL SYSTEM

- Swing rebound prevention system
- Straight propel system
- Two-speed travel with automatic shift down
- Sealed & lubricated track links
- 500 mm shoes
- Grease-type track adjusters
- Automatic swing brake

MIRRORS, LIGHTS & CAMERAS

- Rear view mirror, rear view camera, and right side view camera
- Two front working lights (LED)

CAB & CONTROL

- Two control levers, pilot-operated
- Horn, electric
- Integrated left-right slide-type control box
- LED door light (interior)
- Coat hook
- Large cup holder
- Detachable two-piece floor mat
- Heightriser seat
- Retractable seatbelt
- Headrest
- Handrails
- Intermittent windshield wiper with double-spray washer
- Tinted safety glass
- Pull-type front window and removable lower front window
- Easy-to-read 10-inch LCD SCREEN multi-display monitor
- Emergency escape hammer
- 24 V power outlet
- Automatic air conditioner
- KOMEXS

OPTIONAL EQUIPMENT

- Various optional arms
- Wide range of shoes
- Wide range of buckets
- Front-guard protective structure (may interfere with bucket action)
- Additional counterweight (+580 kg)

- Cab top work LED lights (two lights)
- N&B piping
- Dozer blade
- Travel alarm
- Additional track guide

Note: Standard and optional equipment may vary. Consult your KOBELCO dealer for specifics.



Total Support for Machines with Network Speed and Accuracy

KOMEXS is a cellular based telematics system for receiving machine information. Manage your machines anywhere in the world using the Internet. Location, workload and diagnostic data aid business operations.

Direct Access to Operational Status

Location Data

Accurate location data can be obtained even from sites where communications are difficult.

Fuel Consumption Data

Data on fuel consumption and idling times can be used to indicate improvements in fuel consumption.

Operating Hours

A comparison of operating times of machines at multiple locations shows which locations are busier and more profitable. Operating hours on site can be accurately recorded, for running time calculations needed for rental machines, etc.

Graph of Work Content

The graph shows how working hours are divided among different operating categories, including digging, idling, traveling, and optional operations (N&B).

Maintenance Data and Warning Alerts

Machine Maintenance Data

Provides maintenance status of separate machines operating at multiple sites. Maintenance data is also relayed to KOBELCO service personnel, for more efficient planning of periodic servicing.

Security System

Engine Start Alarm

Sends a notification if the engine is started outside of pre-defined hours.

Area Alarm

Sends a notification if the machine leaves a pre-defined area.

